



# Indoor Workout Equipment



2020 INDOOR WORKOUT EQUIPMENT CATALOG

**realsport**



**KENGURU  
PRO**

## Functional, technologically advanced & aesthetically appealing equipment

Kenguru Professional manufactures durable indoor fitness and calisthenic equipment. Our indoor sports rigs are also rated for use in the outdoors, gyms and competitions! All equipment has been designed in accordance with international practices with adherence and recommendations from professional athletes. Most notably KENGURU.PRO has helped popularize Calisthenics as a sport while promoting healthy lifestyles in local communities worldwide. Our Indoor is rated for outdoor but comes with a Flange at the column base. Instead of being buried beneath it is bolted directly to the concrete. Added stability plates can be added to any combination below (added cost). Indoor equipment is perfect for gyms with options for wall mounts also available. We also offer our indoor for competitions due to its portability. Please let us design your custom Gym!

- 1) KENGURUPRO US, LLC.
- 2) Mailing Address: 2730 Shute St, Orlando, FL 32805
- 3) Homepage: [WWW.KENGURUPRO.US](http://WWW.KENGURUPRO.US)
- 4) E-mail: [info@kengurupro.us](mailto:info@kengurupro.us)







## D-1

Curved parallel bar 48mm - 2  
(Stability Plates Optional)

Dimensions (mm):	1634x2201
Minimum required installation (sq ft):	38.75

## D-2

Pull-up bar 34mm - 3  
Swedish wall - 1  
(Stability Plates Optional)

Dimensions (mm):	1634x1651
Minimum required installation (sq ft):	29.06



## D-3

Pull-up bar 34mm - 2  
Swedish wall - 1  
Standard parallel bar 34mm - 1  
(Stability Plates Optional)

Dimensions (mm):	2184x1651
Minimum required installation (sq ft):	38.75



## D-4

Pull-up bars 34mm - 2  
Swedish wall - 1  
Monkey Bar - 1  
(Stability Plates Optional)

Dimensions (mm): 1651x3472  
Minimum required installation (sq ft): 61.67



## D-5

Pull-up bar 34mm - 5  
Swedish wall - 1  
Standard parallel bar 34mm - 2  
(Stability Plates Optional)


Dimensions (mm): 1651x4211  
Minimum required installation (sq ft): 74.81



## D-6

Pull-up bar 34mm - 3  
Swedish wall - 1  
Pull-up bar thick & wide 48mm - 2  
Pull-up bar "hammer" 34mm - 1 p  
Curved parallel bar 48mm - 1  
Parallel bar wide 48mm - 1  
(Stability Plates Optional)

Dimensions (mm): 3472x3481  
Minimum required installation (sq ft): 129.17

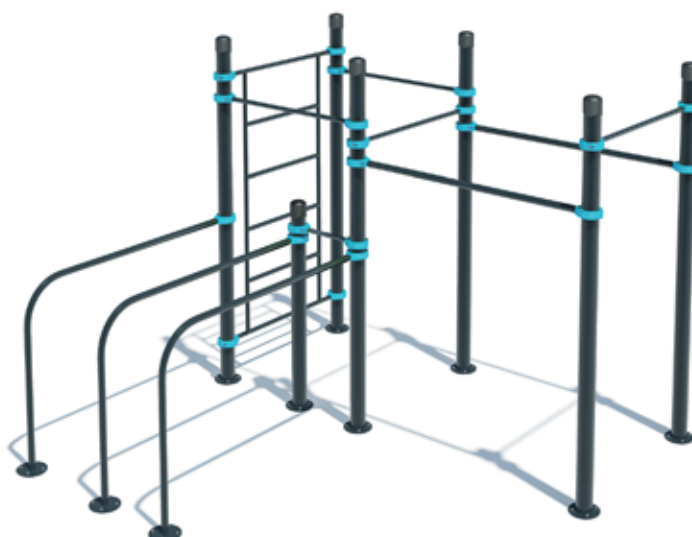



## D-7

Pull-up bar thick&wide 48mm - 2  
 Pull-up bar wide 34mm - 2  
 Swedish wall - 1  
 Pull-up bar 34mm - 1  
 Curved parallel bar 48mm - 1  
 Parallel bar wide 48mm - 1  
*(Stability Plates Optional)*

<b>Dimensions (mm):</b>	2201x4752
<b>Minimum required installation (sq ft):</b>	112.59

## D-8

Pull-up bar 34mm - 3  
 Pull-up bar thick&wide 48mm - 2  
 Monkey bar - 1  
 Curved parallel bar 48mm - 1  
 Parallel bar wide 48mm - 1  
*(Stability Plates Optional)*

<b>Dimensions (mm):</b>	4202x4022
<b>Minimum required installation (sq ft):</b>	181.91



## D-9

Pull-up bar 34mm - 6  
 Curved parallel bar 48mm - 1  
 Parallel bar wide 48mm - 1  
 Pull-up bar "hammer" 34mm - 1  
 Swedish wall - 1  
 Wave bar - 1  
*(Stability Plates Optional)*


<b>Dimensions (mm):</b>	3481x4202
<b>Minimum required installation (sq ft):</b>	157.15



## D-10

Pull-up bar 34mm - 10; Swedish wall - 1; Curved parallel bar 48mm -1; Parallel bar wide 48mm - 1  
Monkey bar - 1; Parallel bar short 34mm - 1; Pull-up bar "hammer" 34mm - 1; Hook - 1  
(Stability Plates Optional)

Dimensions (mm): 4202x4022 Minimum required installation (sq ft): 181.91

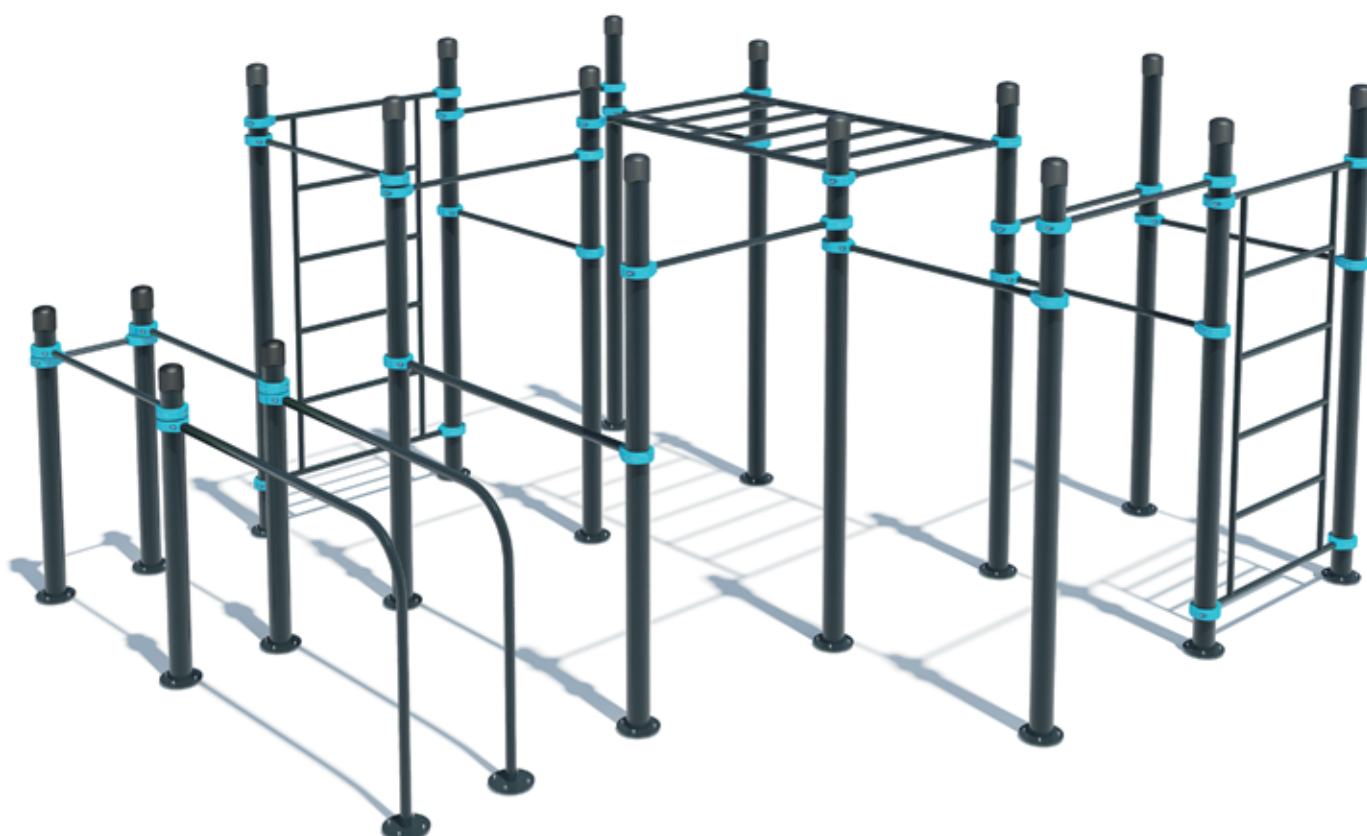

**PRICE\*** The specified prices are denoted for the constructions that are galvanized and powder coated in the original Kenguru Pro powder paints RAL 1026 and RAL 7016. Different colors are available, if needed. The cost for re-paint will be added to the final account individually. The specified prices do not include shipping cost. Shipping cost will be calculated for each order individually. The items will be shipped from Riga, Latvia.

### TECHNICAL PART

**Column\*\***-steel tube with a diameter of 108 mm, thickness of wall not less than 3.2 mm.

**Crossbar\*\***- steel tube with a diameter of 34 mm, thickness of wall not less than 3.2 mm. On crossbar ends holes under bolts M10.

**Collar \*\*\***- steel collars with holes for crossbars, with possibility for fixation from crank and firm fixation on vertical back column. Collar is tightened with two bolts M10.

**Bars \*\*\*\***- tube with a diameter of 50 mm.

All vertical back columns have elliptical plugs.

Prices subject to change.

Shipping is estimated based on current shipping rates/fees. Subject to change.